

Last Modified: 12-04-2024	6.11:8.1.0	Doc ID: RM10000002B00B
Model Year Start: 2023	Model: Prius Prime	Prod Date Range: [03/2023 -]
Title: M20A-FXS (EMISSION CONTROL): FUEL VAPOR CONTAINMENT VALVE (for PHEV Model): INSPECTION; 2023 - 2024 MY Prius Prime [03/2023 -]		

INSPECTION


PROCEDURE

1. INSPECT FUEL VAPOR CONTAINMENT VALVE (CLOSE TANK WITH BOLT VALVE ASSEMBLY)

(a) Measure the resistance according to the value(s) in the table below.

Standard Resistance:

TESTER CONNECTION	CONDITION	SPECIFIED CONDITION
1 (+UL) - 2 (+UM)	20°C (68°F)	29 to 33 Ω
3 (+UN) - 4 (+UP)	20°C (68°F)	29 to 33 Ω

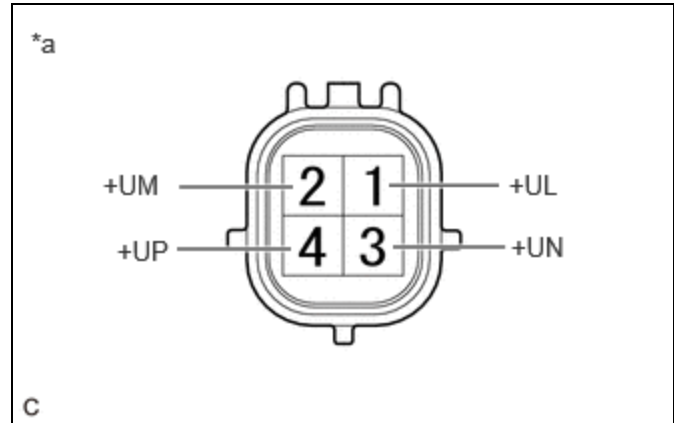

If the result is not as specified, replace the fuel vapor containment valve (close tank with bolt valve assembly).

*a	Component without harness connected (Fuel Vapor Containment Valve (Close Tank with Bolt Valve Assembly))
----	--

