POWER OUTLETS (INT): ACCESSORY POWER OUTLET SYSTEM: HOW TO PROCEED WITH TROUBLESHOOTING; 2023 -...

-1

Last Modified: 12-04-2024	6.11:8.1.0	Doc ID: RM10000002BJUA	
Model Year Start: 2023	Model: Prius Prime	Prod Date Range: [03/2023 -]
Title: POWER OUTLETS (INT): ACCESSORY POWER OUTLET SYSTEM: HOW TO PROCEED WITH			
TROUBLESHOOTING; 2023 - 2024 M	1Y Prius Prius Prime [03/202	23 -]	

HOW TO PROCEED WITH TROUBLESHOOTING

CAUTION / NOTICE / HINT

HINT:

Use the following procedure to troubleshoot the accessory power outlet system.

PROCEDURE

1.	VEHICLE BROUGHT TO WORKSHOP	

NEXT

2. CUSTOMER PROBLEM ANALYSIS

HINT:

- In troubleshooting, confirm that the problem symptoms have been accurately identified. Preconceptions should be discarded in order to make an accurate judgment. To clearly understand what the problem symptoms are, it is extremely important to ask the customer about the problem and the conditions at the time the malfunction occurred.
- Gather as much information as possible for reference. Past problems that seem unrelated may also help in some cases.
- The following 5 items are important points for problem analysis:

What	Vehicle model, system name
When	Date, time, occurrence frequency
Where	Road conditions
Under what conditions?	Driving conditions, weather conditions
How did it happen?	Problem symptoms

NEXT

3.

12/15/24, 10:45 PM POWER OUTLETS (INT): ACCESSORY POWER OUTLET SYSTEM: HOW TO PROCEED WITH TROUBLESHOOTING; 2023 -...

(a) Measure the auxiliary battery voltage with the ignition switch off.

Standard Voltage: 11 to 14 V

If the voltage is below 11 V, recharge or replace the auxiliary battery before proceeding to the next step.

- (b) Check the fuses and relays.
- (c) Check the connector connections and terminals to make sure that there are no abnormalities such as loose connections, deformation, etc.

NEXT

4. CHECK FOR DTCs	
-------------------	--

(a) Using the GTS, check for DTCs.

Powertrain > Hybrid Control > Trouble Codes

RESULT	PROCEED TO
DTCs are not output	A
DTCs are output	В

B GO TO HYBRID VEHICLE CONTROL SYSTEM

A V

5. PROBLEM SYMPTOMS TABLE


(a) Refer to Problem Symptoms Table.

Click here

RESULT	PROCEED TO
Fault is not listed in Problem Symptoms Table	A
Fault is listed in Problem Symptoms Table	В

B GO TO PROBLEM SYMPTOMS TABLE



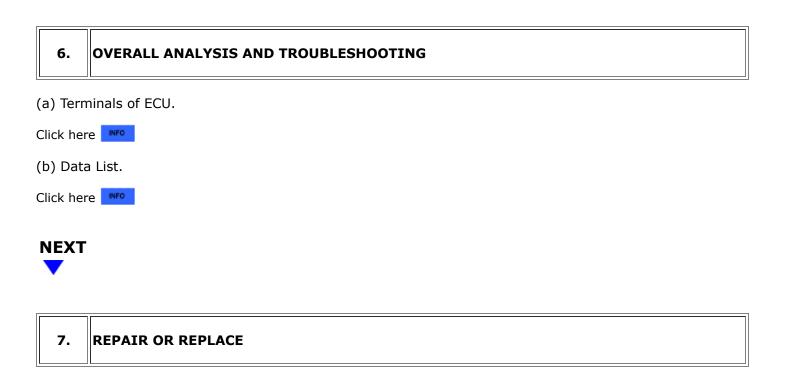

NEXT

8.	CONFIRMATION TEST

ΤΟΥΟΤΑ

•